


FLUSH TRIMMING BITS

For edge trimming of laminated sink tops.

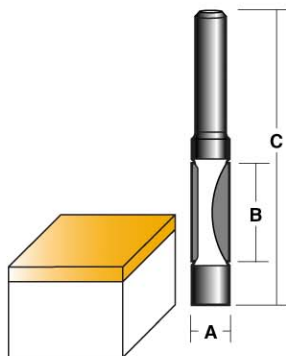

CARBIDE TIPPED - WITH PILOT
6.35 mm (1/4") SHANK

| PART No | A | | B | | C | |
|---------|-----|----|-----|----|-----|----|
| | in. | mm | in. | mm | in. | mm |

SINGLE FLUTE CARBIDE TIPPED


| | | | | | | |
|--------|------|---|-------|------|-------|----|
| T 1910 | 5/16 | 8 | 13/16 | 20.6 | 2-3/8 | 65 |
|--------|------|---|-------|------|-------|----|

TWO FLUTES CARBIDE TIPPED

| | | | | | | |
|----------|------|---|-------|------|-------|----|
| T 1910 2 | 5/16 | 8 | 13/16 | 20.6 | 2-3/8 | 63 |
|----------|------|---|-------|------|-------|----|

COMBINATION FLUSH TRIMMING & DRILLING BITS

This bit drills its own hole for blind routing in plywood and soft metals. Eliminates fitting edges at window and floor openings.

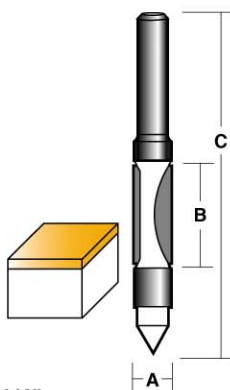

WITH PILOT
SUFFIX 1/2 = 1/2" SHANK,
SUFFIX 3/8 = 3/8" SHANK, OTHERWISE 1/4"

| PART No | A | | B | | C | |
|---------|-----|----|-----|----|-----|----|
| | in. | mm | in. | mm | in. | mm |

SINGLE FLUTE HIGH SPEED STEEL

| | | | | | | |
|------------|-----|------|-------|------|-------|----|
| H 1508 | 1/4 | 6.35 | 3/4 | 19 | 2-3/8 | 60 |
| H 1512 3/8 | 3/8 | 9.5 | 7/8 | 22.2 | 2-5/8 | 67 |
| H 1516 1/2 | 1/2 | 12.7 | 1-1/8 | 28.6 | 3-5/8 | 92 |

SINGLE FLUTE SOLID CARBIDE

| | | | | | | |
|--------|-----|------|-------|----|-------|------|
| T 1508 | 1/4 | 6.35 | 25/32 | 20 | 2-1/2 | 63.5 |
|--------|-----|------|-------|----|-------|------|


SINGLE FLUTE CARBIDE TIPPED

| | | | | | | |
|------------|------|------|-------|------|-------|----|
| T 1510 | 5/16 | 8 | 13/16 | 20.6 | 2-3/4 | 70 |
| T 1512 3/8 | 3/8 | 9.5 | 1 | 25.4 | 3 | 76 |
| T 1516 1/2 | 1/2 | 12.7 | 1 | 25.4 | 3-1/2 | 89 |

TWO FLUTES CARBIDE TIPPED

| | | | | | | |
|----------|------|---|-------|------|-------|----|
| T 1510 2 | 5/16 | 8 | 13/16 | 20.6 | 2-3/4 | 70 |
|----------|------|---|-------|------|-------|----|

This bit is used extensively in the caravan repair and manufacturing industries for drilling and trimming sheet aluminium.




SPIRAL DOWNCUT
HIGH SPEED STEEL - WITH PILOT
SUFFIX 1/2 = 1/2" SHANK,
SUFFIX 3/8 = 3/8" SHANK,
OTHERWISE 1/4"

| PART No | A | | B | | C | |
|--------------|-----|------|-------|------|-------|-----|
| | in. | mm | in. | mm | in. | mm |
| HSF 1508 | 1/4 | 6.35 | 3/4 | 19 | 2-3/4 | 70 |
| HSF 1512 3/8 | 3/8 | 9.5 | 25/32 | 20 | 3 | 76 |
| HSF 1516 1/2 | 1/2 | 12.7 | 1-3/4 | 44.4 | 4-1/2 | 115 |

SLOTING CUTTER ASSEMBLIES

Solid carbide cutters give great rigidity for thin slotting cuts.




SOLID CARBIDE CUTTER
TWELVE TEETH
6.35 mm (1/4") SHANK

| PART No. | A | | B | | C | | ARBOR No. |
|-------------|-------|------|------|-----|-------------|----|-----------|
| | in. | mm | in. | mm | in. | mm | |
| TA 900 1.2M | 1-1/4 | 31.8 | 3/64 | 1.2 | 1-5/8 | 41 | TA 11 |
| TA 900 1.6M | 1-1/4 | 31.8 | 1/16 | 1.6 | 1-5/8 | 41 | TA 11 |
| T 900 1.2M | 1-1/4 | 31.8 | 3/64 | 1.2 | Cutter only | | |
| T 900 1.6M | 1-1/4 | 31.8 | 1/16 | 1.6 | Cutter only | | |

SLOTING CUTTER ASSEMBLIES

SOLID CARBIDE CUTTER
TWELVE TEETH
with ball bearing Guide
6.35 mm (1/4") SHANK



| PART No. | A | | B | | C | | ARBOR No. |
|--------------|-------|------|------|-----|--------|----|-----------|
| | in. | mm | in. | mm | in. | mm | |
| TA 900 1.2MB | 1-1/4 | 31.8 | 3/64 | 1.2 | 2-3/32 | 53 | TA 10 |
| TA 900 1.6MB | 1-1/4 | 31.8 | 1/16 | 1.6 | 2-3/32 | 53 | TA 10 |

Replacement Ball Bearing TB11


KITS

SIX BIT STARTER ROUTER BIT SET

HIGH SPEED STEEL
PART No. H202-457

Set includes:

- 1-Router Bit Case
- 1-H112 1-H216
- 1-H416 1-H916
- 1-H508 1-H208



Supplied in handy Plastic Case.
Case sold separately
Part No. TCASE

THREE BIT LAMINATE TRIM SET

CARBIDE TIPPED
PART No. TRBS-1

Set includes:

- 1-T 192.22 B
- 1-T 192.00 B
- 1-T 208 S

